



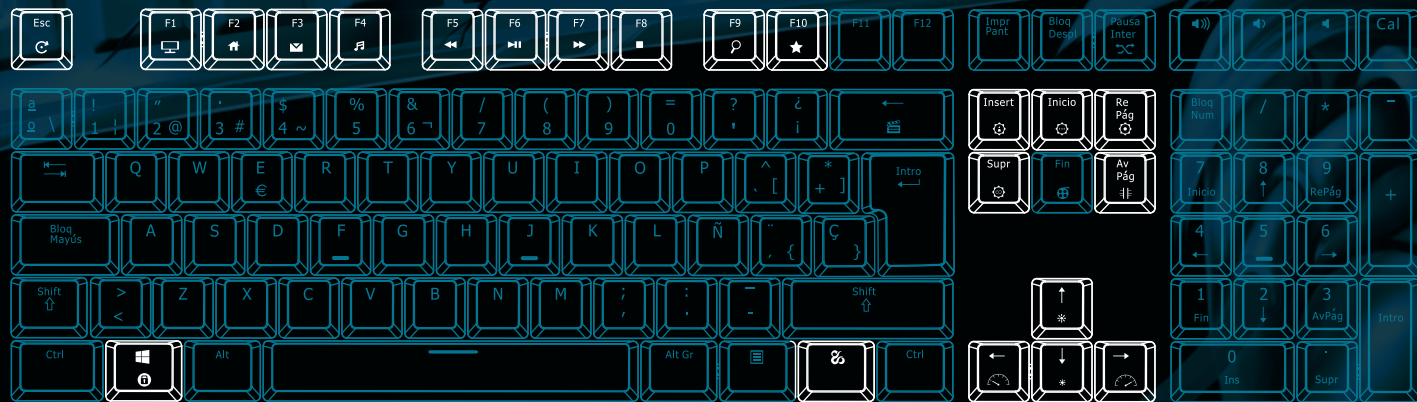
NEWSKILL

SUIKO











QUICK GUIDE











RGB MECHANICAL KEYBOARD



KEY FUNCTION


 + F1	Computer	 + F8	Stop
 + F2	Web	 + F9	Magnifier
 + F3	E-mail	 + F10	Collection
 + F4	Music	 + Esc	Press for 3 seconds.
 + F5	Previous track		Restore factory settings
 + F6	Star / Pause	 + 	Lock Win Key
 + F7	Next track		

BACKLIGHT SETTING


 + Ins	Interactive backlight mode	 + PgUp	Backlight color switching Single color
	Support for 5 modes of backlight switching.		backlight switching (except for individual modes
 + Del	RGB backlight mode Support		can not be switched, other modes can be).
	for 11 RGB mode cycle handover.		
 + Home	Backlight breathing mode	 + ↑*	Increase brightness, 5 level setting
	Support 8 breathing mode cycle switching.	 + ↓*	Reduce brightness, 5 level setting
		 + ↺	Reduce dynamic speed, 5 level setting
		 + ↻	Increase dynamic speed, 5 level setting





CUSTOM BACKLIGHT SETTINGS







 + End Custom backlight mode switching

Support 5 sets of custom backlight switching.

When press  +END, the full keyboard goes out. When number Key 1 backlight lights up, indicates that the first set of lighting recording modes has been entered.

Press  +END again. Number key 2 backlight light up, indicates entering the second set of lighting recording modes, and so on.







 +  (Del) Custom backlit recording

1. Select any set of custom backlight modes through  + End
2. Press  +  (Del), at this time the Caps Win Scrk Num Fore keys flicker, indicates you have entered the light recording mode.
3. Click on the button to change the color of the button lights, and so on, setting a satisfactory backlight effect.
4. After recording, press  +  (Del) again to save.
5. Complete, and so on through the  + End can be switch and set 5 different sets of custom backlight effects.

The keyboard has memory function. After the USB is plugged twice, the lamp effect set before remains unchanged.



SIDE LAMP SETTING

-  + RePag Side lamp mode switch Support 6 kinds of dynamic side lights
-  + Pause Side lamp color / direction Set the color and dynamic direction of side lights.
-  + 5 Increase the brightness of side lights, 5 level setting
-  + 2 ↓ Reduce side lights brightness, 5 level settings
-  + 1 Reduce side lamp dynamic speed, 5 level setting
-  + 3 Increase side lights dynamic speed, 5 level settings